


ACG HF Multi ISO OEM Module RDHO-0201N0-02

The ACG HF Multi ISO OEM Module is a contact less proximity read/write device that supports various ISO14443 A/B, ISO15693, ISO18000-3, NFC and EPC RFID-devices, including the whole mifare® family. The module needs an external application specific antenna to operate. By using the serial interface the device can be connected to a controller or any host system easily. An integrated SAM Interface enables a state of the art security level. This RFID read/write unit is optimized for maximum data throughput rates on both, the air interface as well as the serial interface. The built in boot-loader enables firmware field upgrades via the serial interface.

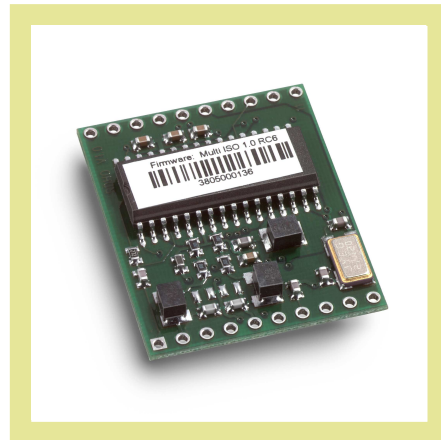

Typical Applications

- e-Payment
- e-Toll Road Pricing
- e-Ticketing for Events & Public Transport
- Access Control
- PC Access
- Authentication
- Logistics & Supply Chain Management
- Printer / Mobile Devices / Production Equipment

Technical Data

Part Number	RDHO-0201N0-02		
RF Transmit Frequency	13.56MHz		
Supported Standards	ISO14443A, ISO14443B, ISO 15693, ISO 18000-3, NFC enabled, ICODE		
Supported Tag-ICs	mifare® Standard mifare® 4k mifare® Pro mifare® Ultralight mifare® DESFIRE mifare® SmartMX I-CODE SLI (SL2 ICS 20) I-CODE EPC (SL2 ICS 10) I-CODE UID (SL2 ICS 11) I-CODE NFC (Reader To Tag Mode)	SLE 55Rxx SRF55VxxP+S SLE 66CL160S SLE 66CLX320P SR176 SRIX4K LRI 64 LRI 512 EM4135 KSW Temp Sens®	Tag-it™ HF-I Standard Tag-it™ HF-I Pro Jewel Tag Sharp B ASK GTML ASK GTML2ISO TOSMART P032/P064 ISO14443A Tags ISO14443B Tags ISO15693 Tags
Host Communication	Point-to-Point		
Communications Interface	CMOS-TTL		
Communications Protocol	Specific ASCII or Binary Protocol		
Communications Parameter	9600 Bit/s to 460 kBit/s, 8, N,1		
Firmware Boot-Loader	Supported Via Serial Interface		
Software, Driver	API - DLL (MSVC++)		
Power Supply	5VDC regulated		
Current Consumption	90 – 200mA depending on antenna < 10µA at power down mode		
Reading distance	up to 90 mm / 3.54 Inch, depending on tag and antenna		
RF Transmission Speed	up to 848 kBit/s		
Antenna	External		
Input/Output Connector	2 status indicator LED lines, 1 I/O Port, SAM Interface		
Size	(LxWxH) 25.5x30.0x4.8mm ± (L/W) 0.5 (H) 1.0 / 1.00x1.18x0.19 Inch ± (L/W) 0.02 (H) 0.04 Inch		
Weight	5g ± 5% / 0.01 lb± 5%		
Operating Temperature	-20°C to +80°C / - 4F to + 176F		
Storage Temperature	-40°C to +85°C / - 40F to + 185F		
Firmware Version	1.0		
MTBF	3.000.000 h		
Approvals/Compliances	RoHS compliant		

For more information, please contact the sales office nearest you or visit our website: www.acg-id.com

ACG Identification Technologies GmbH reserves the right to change its services and products at any time without prior notice. ACG provides customer assistance in various technical areas, but does not have full access to data concerning the uses and applications of customer products. Therefore, ACG assumes no responsibility for customer product designs or for infringement of patents and/or the rights of third parties, which may result from assistance provided by ACG.

ACG Identification Technologies GmbH Am Klängenweg 6a D - 65396 Walluf
Tel.: +49 (0) 61 23 / 791 - 0 Fax: +49 (0) 61 23 / 791 - 199

Document # 1508-DTS-01-0-03

RFID@acg-id.com www.acg-id.com

Subject to technical modifications 05/06

ACG® is a registered trademark of ACG Identification Technologies GmbH. All other trademarks referred herein belong to their respective companies.
© ACG Identification Technologies GmbH 2006