


# SCR531

## The Universal Connectivity Solution

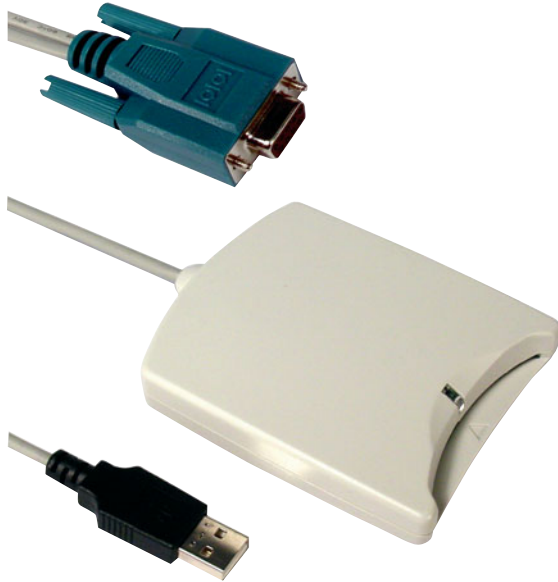

### Overview

The SCR531 smart card reader is equipped with exchangeable cable for USB and serial port. It is a logical extension of the SCR smart card reader family based on SCM Microsystems' STC II micro controller. The STC II chip supports multiple interfaces, multiple reader devices and all relevant security standards. It was the industry's first to offer On-board Flash, allowing future firmware and application enhancements.

The reader supports multiple interfaces and relevant security standards; the interface is PC/SC and EMV2000 Level 1 compliant.

### SCR531 Benefits

- Dual host interface: USB and serial with exchangeable cable
- On-board flash provides seamless firmware upgrades in the field
- EMV Level 1 AND PC/SC certification based on a single solution
- High performance
- Fully tested and compliant with all major smart cards in the market
- Customizing options: casing, colors, and company logo

### PC Security Solutions

U.S. Headquarters  
 SCM Microsystems Inc.  
 41740 Christy Street  
 Fremont, CA 94538 USA  
 E-mail [scmsales@scmmicro.com](mailto:scmsales@scmmicro.com)  
 Phone +1 510 360 2300  
 Fax +1 510 360 0211

European Headquarters  
 SCM Microsystems GmbH  
 Oskar-Messter-Str. 13  
 85737 Ismaning, Germany  
 E-mail [sales@scmmicro.de](mailto:sales@scmmicro.de)  
 Phone +49 89 9595 5000  
 Fax +49 89 9595 5555

SCM Microsystems Japan, Inc.  
 8F Hirakawacho Ronstate, 2-11-1,  
 Hirakawa-cho, Chiyoda-ku,  
 Tokyo, Japan 102-0093  
 E-mail [sales@scmmicro.co.jp](mailto:sales@scmmicro.co.jp)  
 Phone +81 3 3511 8511  
 Fax +81 3 3511 8516

SCM Microsystems India Pvt. Ltd.  
 Module No. 0506, 0507 & 0508  
 D' Block South, 5th Floor  
 Tidel Park, 4 Canal Bank Road  
 Taramani  
 Chennai 600113, India  
 E-mail [sales@scmmicro.co.in](mailto:sales@scmmicro.co.in)  
 Phone +91 44 2254 0020  
 Fax +91 44 2254 0029



# SCR531

## Technical Data

Host Interface	<b>Dual Mode</b> <ul style="list-style-type: none"> <li>• Full speed USB (12 Mbps), bus powered, CCID compliant</li> <li>• PnP RS232 (115,200 bps)</li> </ul>
Smart Card Interface	<ul style="list-style-type: none"> <li>• T=0, T=1 protocol support</li> <li>• Memory card support through SCM MCARD API</li> <li>• Communication speed up to 344,105 bps for USB and 307 kbps for serial (PPS, FI parameter)</li> <li>• Frequency up to 8 MHz (PPS, DI parameter)</li> <li>• Support ISO 7816 Class A and AB smart card</li> </ul>
Smart Card Connector	<ul style="list-style-type: none"> <li>• 8 contacts - ISO location</li> <li>• 100,000 insertions</li> <li>• Sliding contact</li> </ul>
Human Interface	<ul style="list-style-type: none"> <li>• One dual state green LED</li> </ul>
Cable/Power	<b>Exchangeable cable</b> <ul style="list-style-type: none"> <li>• 1.5m long with USB type A connector</li> <li>• 1.5m long with F-DB9 and Pass-through PS/2</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>• LWH 90 x 70 x 16.5 mm, weight 190 grams</li> </ul>
Operating Temperature	<ul style="list-style-type: none"> <li>• 0° to 50° Celsius</li> </ul>
OS	<b>Serial</b> <ul style="list-style-type: none"> <li>• Windows® 98, ME, NT4, 2000, XP</li> <li>• Windows® CE 4.2, 5.0</li> <li>• Solaris, Linux</li> </ul> <b>USB</b> <ul style="list-style-type: none"> <li>• Windows® 98, ME, 2000, XP, Server 2003, Vista</li> <li>• Windows® CE 4.2, 5.0</li> <li>• MacOS X, Linux, Solaris</li> </ul>
API	<ul style="list-style-type: none"> <li>• PC/SC</li> <li>• CT-API (thru wrapper on top of PC/SC)</li> </ul>
Approvals	<ul style="list-style-type: none"> <li>• FCC Class B part 15, cULus, CE, VCCI</li> <li>• Microsoft® WHQL 2000, XP, Server2003</li> <li>• EMV Level 1</li> </ul>
Environmental	<ul style="list-style-type: none"> <li>• RoHS</li> <li>• WEEE</li> </ul>

Technical data are subject to change without notice.

### The SCM Microsystems' Advantage

SCM Microsystems brings over a decade of experience in ASIC and smart card reader development to this unique product. With its dedicated Research and Development team and a true global presence, SCM Microsystems delivers high quality products catering to the various requirements in the security field. SCM offers customization of products to suit application needs.

Typical advantages of an SCM Microsystems product include:

- More than 50 patents
- High quality mass production capability
- Industry endorsed SmartOS™ middleware
- Support for all current and emerging international standards
- Customer base of global, top tier PC OEMs, systems integrators and smart card industry leaders
- Direct significant long-term relationships with all leading smart card manufacturers and application providers

