


SCR131

The Premier Serial Solution

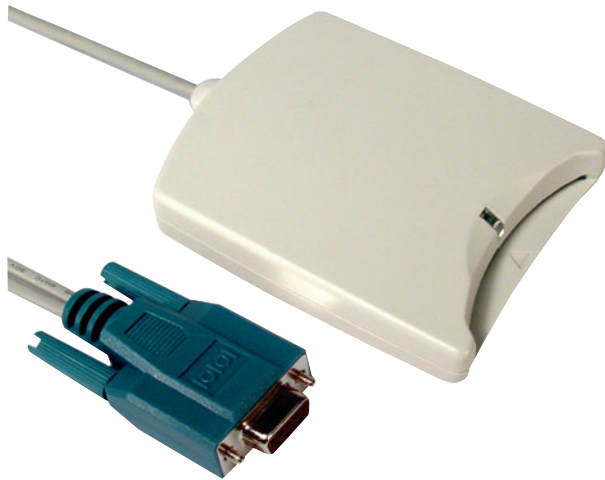

Overview

The SCR131 smart card reader is the premier serial solution. The reader is based on SCM's STC II controller chip that supports multiple interfaces, multiple reader devices and all relevant security standards. The STC II chip was the industry's first to offer On-board Flash, allowing future firmware and application enhancements. This provides SCM Microsystems with the unique ability to offer high performance and cost effective solutions.

SCR131 Benefits

- On-board flash provides seamless firmware upgrades in the field
- EMV Level 1 AND PC/SC certification based on a single solution
- High performance
- Fully tested and compliant with all major smart cards in the market
- Customizing options: casing, colors, and company logo

PC Security Solutions

U.S. Headquarters
SCM Microsystems Inc.
41740 Christy Street
Fremont, CA 94538 USA
E-mail scmsales@scmmicro.com
Phone +1 510 360 2300
Fax +1 510 360 0211

European Headquarters
SCM Microsystems GmbH
Oskar-Messter-Str. 13
85737 Ismaning, Germany
E-mail sales@scmmicro.de
Phone +49 89 9595 5000
Fax +49 89 9595 5555

SCM Microsystems Japan, Inc.
8F Hirakawacho Ronstate, 2-11-1,
Hirakawa-cho, Chiyoda-ku,
Tokyo, Japan 102-0093
E-mail sales@scmmicro.co.jp
Phone +81 3 3511 8511
Fax +81 3 3511 8516

SCM Microsystems India Pvt. Ltd.
Module No. 0506, 0507 & 0508
D' Block South, 5th Floor
Tidel Park, 4 Canal Bank Road
Taramani
Chennai 600113, India
E-mail sales@scmmicro.co.in
Phone +91 44 2254 0020
Fax +91 44 2254 0029



www.scmmicro.com

SCR131

Technical Data

Host Interface	<ul style="list-style-type: none"> • PnP RS232 (115,200 bps) • Power supply through PS/2
Smart Card Interface	<ul style="list-style-type: none"> • T=0, T=1 protocol support • Memory card support through SCM MCARD API • Communication speed up to to 307 kbps (PPS, FI parameter) • Frequency up to 8 MHz (PPS, DI parameter) • Support ISO 7816 Class A and AB smart card
Smart Card Connector	<ul style="list-style-type: none"> • 8 contacts - ISO location • 100,000 insertions • Sliding contact
Human Interface	<ul style="list-style-type: none"> • One dual state green LED
Cable/Power	<ul style="list-style-type: none"> • Cable: 1.5 meter long with F-DB9 and Pass-through PS/2
Dimensions	<ul style="list-style-type: none"> • LWH 90 x 70 x 16.5 mm • Weight 140 grams
Operating Temperature	<ul style="list-style-type: none"> • 0° to 50° Celsius
OS	<ul style="list-style-type: none"> • Windows® 98, ME, NT4, 2000 and XP • Windows® CE 4.2, 5.0 • Solaris, Linux
API	<ul style="list-style-type: none"> • PC/SC • CT-API (thru wrapper on top of PC/SC)
Approvals	<ul style="list-style-type: none"> • FCC Class B part 15, cULus, CE, VCCI • Microsoft® WHQL 2000, XP • EMV Level 1
Environmental	<ul style="list-style-type: none"> • RoHS • WEEE

Technical data are subject to change without notice.

The SCM Microsystems' Advantage

SCM Microsystems brings over a decade of experience in ASIC and smart card reader development to this unique product. With its dedicated Research and Development team and a true global presence, SCM Microsystems delivers high quality products catering to the various requirements in the security field. SCM offers customization of products to suit application needs.

Typical advantages of an SCM Microsystems product include:

- More than 50 patents
- High quality mass production capability
- Industry endorsed SmartOS™ middleware
- Support for all current and emerging international standards
- Customer base of global, top tier PC OEMs, systems integrators and smart card industry leaders
- Direct significant long-term relationships with all leading smart card manufacturers and application providers

